

Instruction Manual



Horn Mount
Ducati Multistrada V4
HMT.22.10400


Thank you for choosing DENALI
We know you would rather be riding your bike than wrenching on it, so we go the extra mile to make sure our instructions are clear and as easy to understand as possible. If you have any questions, comments, or suggestions don't hesitate to give our gear experts a call at 401.360.2550 or visit WWW.DENALIELECTRONICS.COM

Please Read Before Installing
DENALI products should always be installed by a qualified motorcycle technician. If you are unsure of your ability to properly install a product, please have the product installed by your local motorcycle dealer. DENALI takes no responsibility for damages caused by improper installation. **Caution:** When installing electronics it is extremely important to pay close attention to how wires are routed, especially when mounting products to the front fender, front forks, or fairing of your motorcycle. Always be sure to turn the handlebars fully left, fully right, and fully compress the suspension to ensure the wires will not bind and have enough slack for your motorcycle to operate properly.


Installation Tips
We strongly recommend using medium strength liquid thread locker on all screws, nuts, and bolts. It is also important to ensure that all hardware is tightened to the proper torque specifications as listed in your owner's manual. For included accessory hardware please refer to the default torque specifications provided below. Inspect all hardware after the first 30 miles to ensure proper torque specifications are maintained.

Bolt Size	in-lbs	ft-lbs	Nm
M3	10.0 in-lbs	-	1.0 Nm
M4	23.0 in-lbs	-	2.5 Nm
M5	44.5 in-lbs	3.5 ft-lbs	5.0 Nm
M6	78.0 in-lbs	6.5 ft-lbs	9.0 Nm
M8	-	13.5 ft-lbs	18.0 Nm
M10	-	30.0 ft-lbs	41.0 Nm
M12	-	52.0 ft-lbs	71.0 Nm

Hardware Sizing Guide
Not sure what size bolt you have? Use this ruler to measure screws, bolts, spacers, etc. Remember, the length of a screw or bolt is measured from the start of the "mounting surface" to the end of the screw, so only include the screw head when measuring countersunk screws.

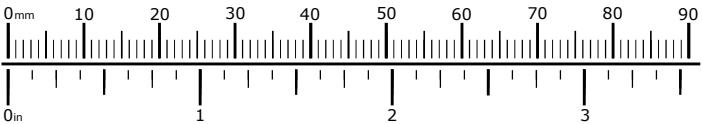

What's In The Box?

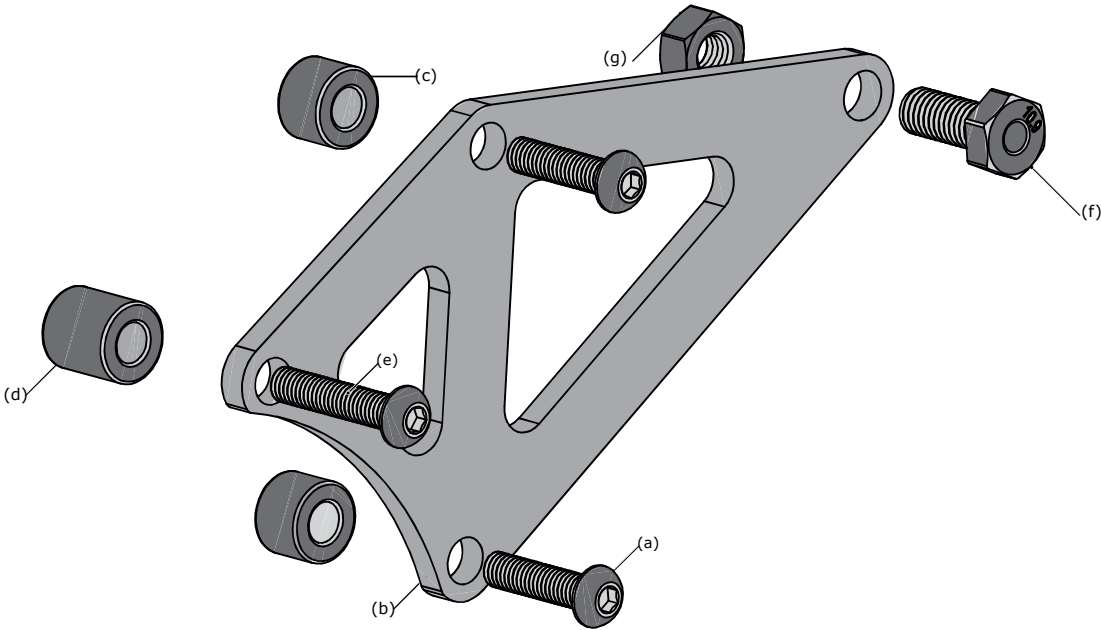


Kit Contents

- (a) M6 x 25mm Button head Screw.....Qty 2
- (b) Horn Mount Bracket (HMT.22.11000-01).....Qty 1
- (c) M6 Spacer (14mm Tall).....Qty 2
- (d) M6 Spacer (16mm Tall).....Qty 1
- (e) M6 x 30mm Button head Screw.....Qty 1
- (f) M8 x 20mm Hex Head Screw.....Qty 1
- (g) M8 Steel Hex nut.....Qty 1

Tools Required:


- (a) 4mm Allen Wrench
- (b) 13mm wrench

1. Installing The Horn Mount

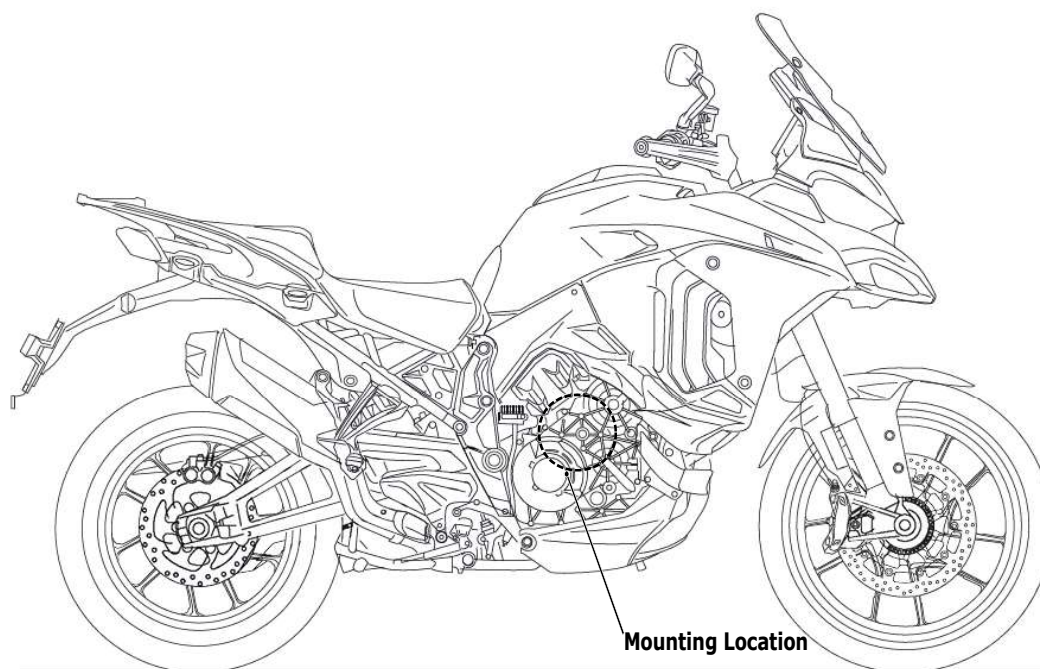

1.1 - Mounting Location

Step One: Identify the mounting location, which is on the throttle side of the bike on the engine's block. There are three vacant M6 tapped holes that will be used for the horn mount.

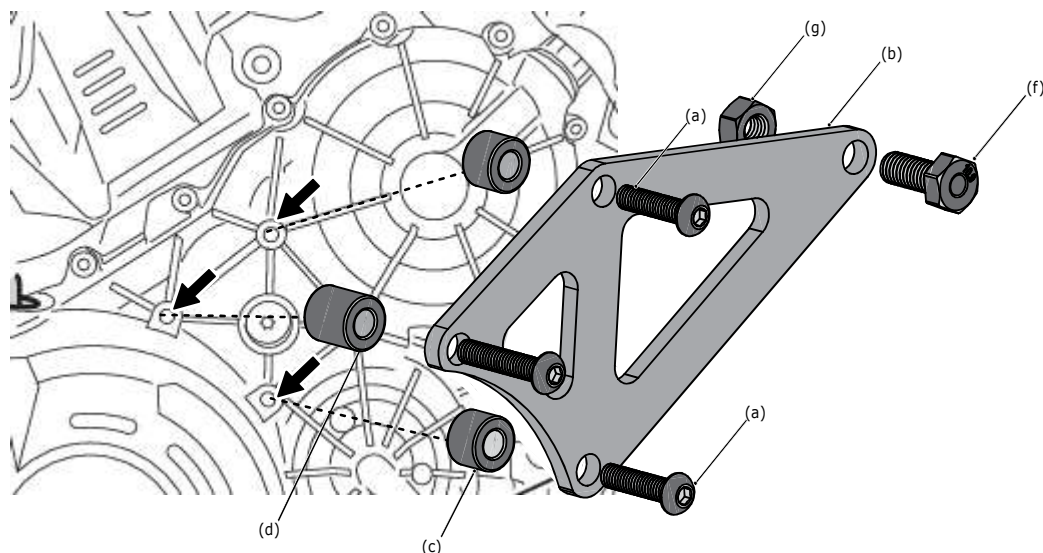

1.2 - Installing the Mount

Step Two: Install the three M6 Spacers (c & d), Horn Mount Bracket (b), and M6 x 25mm and M6 x 20mm screws (a) in the order shown.

Note: The longer 16mm spacer is mounted at the rear most hole on the bike.

Step Three: Install the SoundBomb Horn with the M6 hardware provided with this horn mount kit. It can be helpful to pre-install the Nut & Bolt prior to Step Two.