



FITTING INSTRUCTIONS FOR IA0005 FRONT INDICATOR ADAPTORS
KAWASAKI VERSYS 1000 2019



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY).

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

Digital copies of these instructions are available to download from www.rg-racing.com



LEGEND


- ITEM 1 = INDICATOR ADAPTORS (I0026) (x4)
- ITEM 2 = INDICATOR CONNECTOR (CON0060) (x2)
- ITEM 3 = 200mm LENGTH OF HEAT-SHRINK (666-896) (x2)

TOOLS REQUIRED

- Set of metric Allen keys.
- Philips head screwdriver.
 - 12mm Spanner



Picture 1

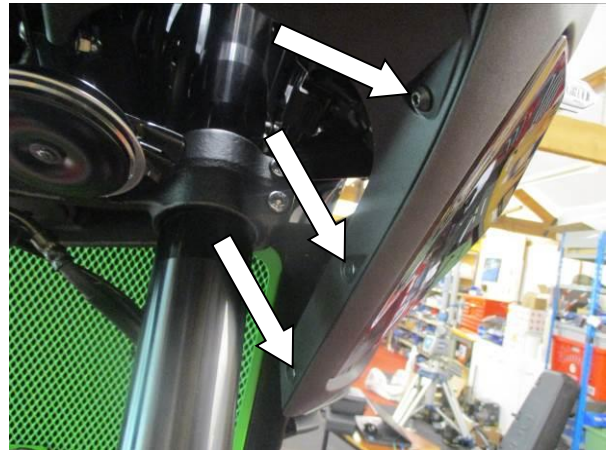

Picture 2




Picture 3



Picture 4



Picture 5

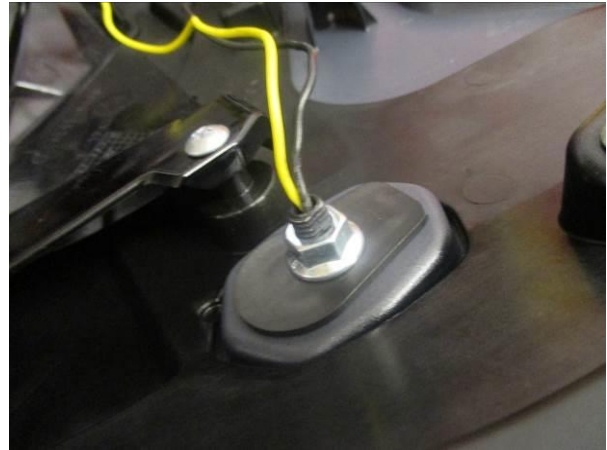

Picture 6



Picture 7

FITTING INSTRUCTIONS

- Remove the bolts/clips arrowed in Picture 1 and Picture 2, while supporting the side panel.
- Carefully remove the side panel and disconnect the indicator (shown in Picture 3).
- Using a Philips head screwdriver, remove the bolt shown in Picture 4.
- Remove the plate, washer and plastic insert.
- Carefully remove the OEM indicator by gently pulling it out of the panel (shown in Picture 5).
- Slide one length of heat shrink (ITEM 3) over the exposed wiring of the mini indicator, and heat gently to shrink it.
- Slide one of the indicator adaptors (ITEM 1) over the thread of the mini indicator, ensuring the profiled side of the adaptor is outward facing.
- Insert the assembly into the profiled slot in the side panel.
- Then slide another indicator adaptor (ITEM 1) over the thread, ensuring the profiled edge goes into the profiled slot in side panel.
- Secure the mini indicator in position using the M8 nut provided.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
 Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Connect one of the Indicator connectors (ITEM 2) to the end of the mini indicator using the bullet connectors.
- Connect the indicator to the wiring loom.
- Refit the panel.
- Repeat for the other side.

ISSUE 1 24/01/2019 (LF)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



**NOTICE DE MONTAGE POUR IA0005BK ADAPTATEURS CLIGNOTANTS AVANT
KAWASAKI VERSYS 1000 2019**



Le kit contient les articles exposés ci-dessous, vérifier que toutes les pièces soient présentes avant de procéder au montage.

LA FAÇON DONT LE KIT EST EMBALLE NE CORRESPOND PAS FORCEMENT A LA FAÇON DE MONTER LES PIECES SUR LA MOTO.

LES PARTIES PRESENTÉES PEUVENT ÊTRE UNIQUEMENT REPRÉSENTATIVES (POUR LA CLARTE DES INSTRUCTIONS UNIQUEMENT)

Notez que si les kits sont emballés avec des rondelles en caoutchouc servant à tenir les composants, ces rondelles doivent être jetées !

Notice disponible au téléchargement sur www.rg-racing.com



LÉGENDE

ARTICLE 1 = ADAPTATEUR CLIGNOTANT AVANT (I0026) (x4)

ARTICLE 2 = CONNECTEUR DE CLIGNOTANT (CON0060) (x2)

ARTICLE 3 = 200mm LONGUEUR DE MANCHON THERMO RÉTRACTABLE (666-896) (x2)

OUTILS REQUIS

- Clés Allen.
- Tournevis cruciforme.
- Clé à molette 12mm



Photo 1

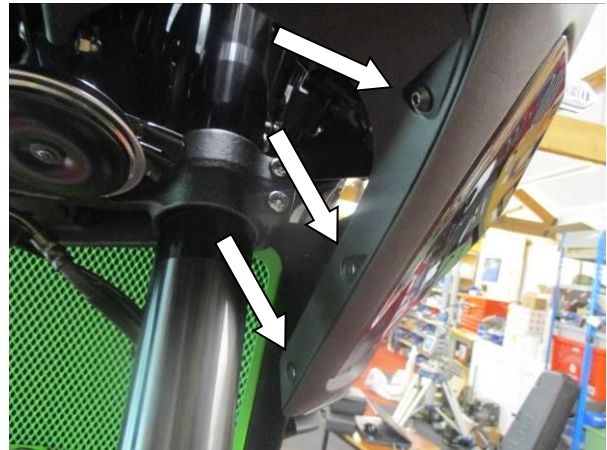


Photo 2



Photo 3



Photo 4

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Photo 5

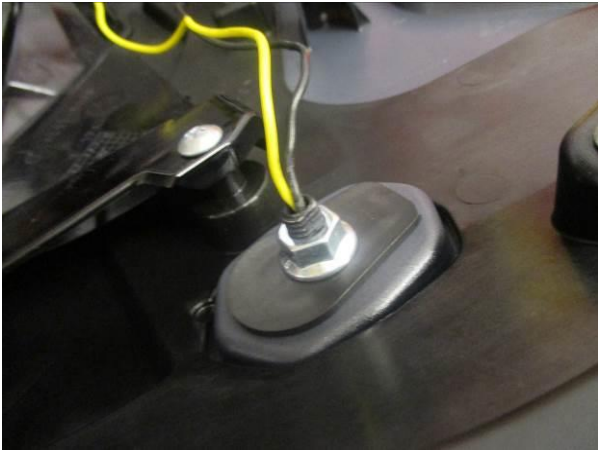


Photo 6



Photo 7



NOTICE DE MONTAGE

- Enlever les boulons/clips indiqués sur la photo 1 et la photo 2, tout en supportant le carénage latéral.
- Enlever délicatement le carénage latéral puis déconnecter le clignotant (voir photo 3).
- Utiliser un tournevis cruciforme, enlever le boulon, voir photo 4.
- Enlever la plaque, la rondelle et l'insert en plastique.
- Enlever délicatement le clignotant d'origine en le tirant doucement vers l'extérieur du carénage (voir photo 5).
- Glisser une longueur de manchon thermo rétractable (ARTICLE 3) sur l'extrémité du fil de mini clignotant puis chauffer pour rétreindre le manchon.
- Glisser un des adaptateurs de clignotant (ARTICLE 1) sur le filetage du mini clignotant, en veillant à ce que la partie profilée de l'adaptateur soit orientée vers l'extérieur.
- Insérer l'ensemble dans la fente profilée du carénage latéral.
- Ensuite, glisser un autre adaptateur de clignotant (ARTICLE 1) sur le filetage, en veillant à ce que le bord profilé se place dans la fente profilée du carénage latéral.
- Fixer le mini clignotant en position en utilisant l'écrou M8 fourni.
- Connecter un des connecteurs de clignotant (ARTICLE 2) sur l'extrémité du mini clignotant en utilisant les connecteurs.
- Connecter le clignotant sur le faisceau de fils.
- Remonter le carénage.
- Répéter l'opération pour l'autre côté.

ISSUE 1 24/01/2019 (LF)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



**MONTAGEANLEITUNG FÜR IA0005 VORDERE BLINKERADAPTER
KAWASAKI VERSYS 1000 2019**



**ALLE KIT-TEILE SIND UNTEN ABGEBILDET UND GEKENNZEICHNET. ÜBERPRÜFEN SIE, DASS ALLE
TEILE VORHANDEN SIND, BEVOR SIE MIT DER MONTAGE BEGINNEN.**

Hinweis: Die Verpackung der Teile stellt nicht die Reihenfolge der Montage dar.

DIE UNTEN ABGEBILDETEN TEILE DIENEN LEDIGLICH ZUR ERKLÄRUNG

**Hinweis für Kits mit Plastikunterlegscheiben an den Schrauben – *Diese Plastikunterlegscheiben
werden nicht für den Einbau benötigt!***

**Eine digitale Version dieser Montageanleitung kann auf folgender Seite heruntergeladen werden:
www.rg-racing.com**



LIEFERUMFANG

ARTIKEL 1 = BLINKERADAPTER (I0026) (x4)

ARTIKEL 2 = VERBINDUNG FÜR BLINKER (CON0060) (x2)

ARTIKEL 3 = 200mm SCHRUMPFSCHLAUCH (666-896) (x2)

SIE BENÖTIGEN FOLGENDES WERKZEUG:

- Satz Inbusschlüssel
- Kreuzschlitzschraubenzieher
- 12 mm Schraubenschlüssel



Abbildung 1



Abbildung 2



Abbildung 3



Abbildung 4

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Abbildung 5

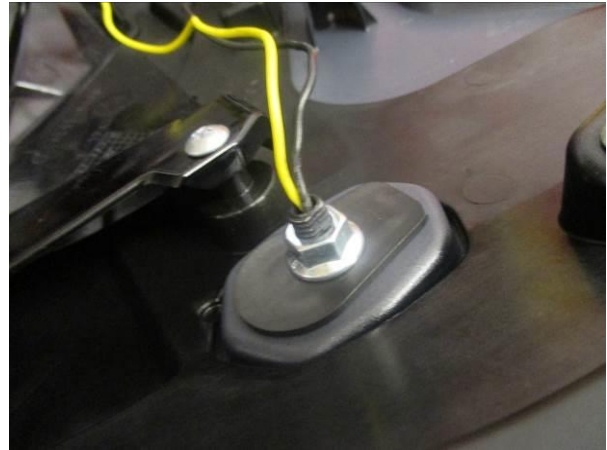


Abbildung 6



Abbildung 7

MONTAGEANLEITUNG

- Entfernen Sie die Schrauben/Clips, die in den Abbildungen 1 und 2 abgebildet sind. Stützen Sie hierbei das Seitenverkleidungsteil.
- Das Seitenverkleidungsteil vorsichtig entfernen und den Blinker trennen (siehe Abbildung 3).
- Entfernen Sie die Schraube, die in Abbildung 4 abgebildet ist, mit einem Kreuzschlitzschraubenzieher.
- Entfernen Sie die Platte, Unterlegscheibe und den Kunststoffeinsatz.
- Entfernen Sie den original Blinker, indem Sie ihn vorsichtig aus dem Verkleidungsteil rausziehen – siehe Abbildung 5.
- Eine Länge Schrumpfschlauch (Artikel 3) über die offene Verkabelung des Miniblinkers schieben und den Schrumpfschlauch mit leichter Hitze schrumpfen.
- Einen Blinkeradapter (Artikel 1) über das Gewinde des Miniblinkers schieben, so dass die Profilseite des Adapters nach außen gerichtet ist.
- Die Einheit in den Schlitz im Seitenverkleidungsteil einsetzen.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
 Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Einen zweiten Blinkeradapter (Artikel 1) über das Gewinde schieben, sodass die Kante mit Profil in den Schlitz im Seitenverkleidungsteil passt.
- Den Miniblinker mit der M8 Mutter vom Kit befestigen.
- Eine Verbindung für den Blinker (Artikel 2) am Ende des Miniblinkers mit einer Kabelverbindung anschließen.
- Den Blinker am Kabelbaum anschließen.
- Montieren Sie das Seitenverkleidungsteil wieder.
- Den Vorgang an der anderen Seite des Motorrades wiederholen.

AUSGABE 1 24/01/2019 (LF)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com