



FITTING INSTRUCTIONS FOR RAD0181 RADIATOR GUARD
YAMAHA YZF-R25/R3 2014-



PICTURE 'A'



PICTURE 'B'

THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

Digital copies of these instructions are available to download from www.rg-racing.com

GENERAL TORQUE SETTINGS

M4 BOLT = 8Nm
 M5 BOLT = 12Nm
 M6 BOLT = 15Nm
 M8 BOLT = 20Nm
 M10 BOLT = 40Nm

TOOLS REQUIRED

- Socket set to include 10 socket and wrench.
 - 4, 5, 6 and 8mm Allen keys.
 - Phillips driver.
 - Torque wrench (up to 40Nm).

In This Kit There Should Be

- 1x Radiator Guard (RAD0181BK)
- 2x 100mm Lengths of self-adhesive Foam
- 1x M6x30mm long button head bolt
 - 1x M6 Nyloc nut
 - 2x M6 washers

R&G Racing

Unit 1 Shelleys Lane, East Worldham, Alton, Hants GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Picture 1




Picture 2




Picture 3



Picture 4

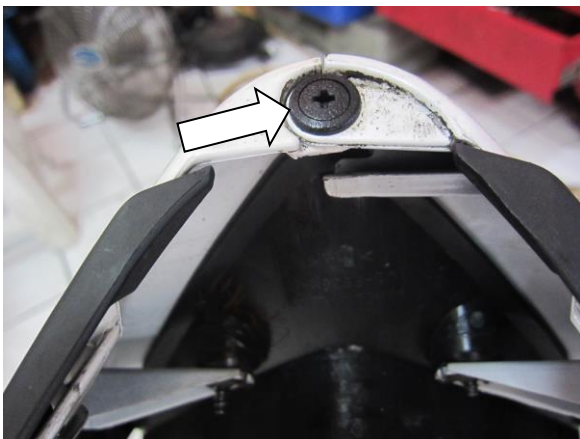

Picture 5

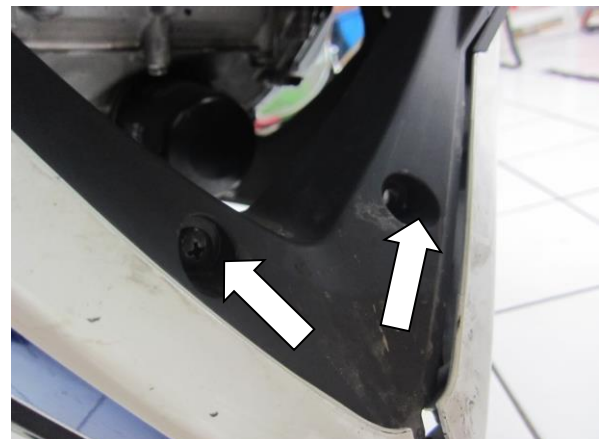

Picture 6



Picture 7



Picture 8



Picture 9



Picture 10



Picture 11



Picture 12



Picture 13



Picture 14




Picture 15



Picture 16



Picture 17

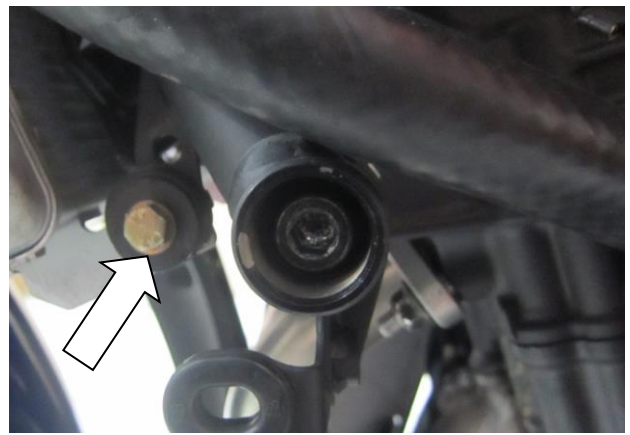

Picture 18



FITTING INSTRUCTIONS

Near side (left side as you sit on bike)

- Remove the two bolts arrowed in pictures 1 and 2 and remove the left hand side plastic infill panel.
- Remove the two bolts arrowed in picture 3 and remove the plastic seat/frame panel.
- Remove the bolts and plastic rivets arrowed in pictures 4 thru 9 and carefully remove the left hand side fairing.

Off side (right side as you sit on bike)

- Remove the two bolts arrowed in pictures 11 and 12 and remove the right hand side plastic infill panel.
- Remove the two bolts arrowed in picture 13 and remove the plastic seat/frame panel.
- Remove the bolts and plastic rivets arrowed in pictures 14 thru 16 and carefully remove the right hand side fairing.
- To fit the radiator guard to the bike, cut the foam strip provided into 10mm wide pieces and stick them to the back of the radiator guard frame, so that they sit between the radiator guard and the radiator.
- Remove the two bolts arrowed in pictures 17 and 18.
- Offer the radiator guard into position and secure using the original two bolts on the lower mounting.
- On the upper mount use the bolt, nut and washers supplied to secure
- Refit all the side fairings and panels as original.

ISSUE 2 02/03/2015 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1 Shelleys Lane, East Worldham, Alton, Hants GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



NOTICE DE MONTAGE POUR RAD0181 GRILLE DE PROTECTION
RADIATEUR
YAMAHA YZF-R25/R3 2014-



PHOTO 'A'



PHOTO 'B'

LE KIT CONTIENT LES ARTICLES EXPOSES CI-DESSOUS, VERIFIER QUE TOUTES LES PIECES SOIENT PRESENTES AVANT DE PROCEDER AU MONTAGE.

LA FAÇON DONT LE KIT EST EMBALLE NE CORRESPOND PAS FORCEMENT A LA FAÇON DE MONTER LES PIECES SUR LA MOTO.

Notez que si les kits sont emballés avec des rondelles en caoutchouc servant à tenir les composants, *ces rondelles doivent être jetées!*

Notice disponible au téléchargement sur www.rg-racing.com

COUPLES DE SERRAGE RECOMMANDES

M4 BOULON = 8Nm
 M5 BOULON = 12Nm
 M6 BOULON = 15Nm
 M8 BOULON = 20Nm
 M10 BOULON = 40Nm

OUTILS REQUIS

- Clé à pipe 10.
- Clés Allen 4, 5, 6 et 8mm.
- Tournevis cruciforme.
- Clé dynamométrique (à 40Nm).

R&G Racing

Unit 1 Shelleys Lane, East Worldham, Alton, Hants GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



Le kit doit contenir

- 1x Grille de protection radiateur (RAD0181BK)
- 2x 100mm Longueurs de mousse autocollante
 - 1x M6x30mm Boulon
 - 1x M6 Ecrou
 - 2x M6 Rondelles

NOTICE DE MONTAGE

Coté gauche (Assis sur la moto)

- Enlever les 2 boulons indiqués sur les photos 1 et 2 puis enlever le panneau interne coté gauche.
- Enlever les 2 boulons indiqués sur la photo 3 puis enlever le panneau plastique de siège/cadre.
- Enlever les boulons et rivets indiqués sur les photos 4 à 9 et enlever le carénage du coté gauche.

Coté droit (Assis sur la moto)

- Enlever les 2 boulons indiqués sur les photos 11 et 12 puis enlever le panneau interne coté droit.
- Enlever les 2 boulons indiqués sur la photo 13 puis enlever le panneau plastique de siège/cadre.
- Enlever les boulons et rivets indiqués sur les photos 14 à 16 et enlever le carénage du coté droit.
- Pour monter la grille de protection radiateur sur la moto, couper la mousse fournie en bandeaux de 10mm de large et collez les au bas du cadre de grille de protection radiateur, de façon à ce qu'ils se placent entre la grille de protection radiateur et le radiateur.
- Enlever les 2 boulons indiqués sur les photos 17 et 18.
- Mettre la grille en position puis fixer à l'aide des 2 boulons d'origine sur le support de fixation inférieur.
- Sur le support supérieur, utiliser le boulon,, l'écrou et les rondelles fournis pour fixer.
- Remonter tous les carénages et panneaux comme à l'origine.

ISSUE 2 02/03/2015 (NSY)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's

R&G Racing

Unit 1 Shelleys Lane, East Worldham, Alton, Hants GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.