



FITTING INSTRUCTIONS FOR REK0001
REFLECTOR-EXTENDER KIT 1




THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.
DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)

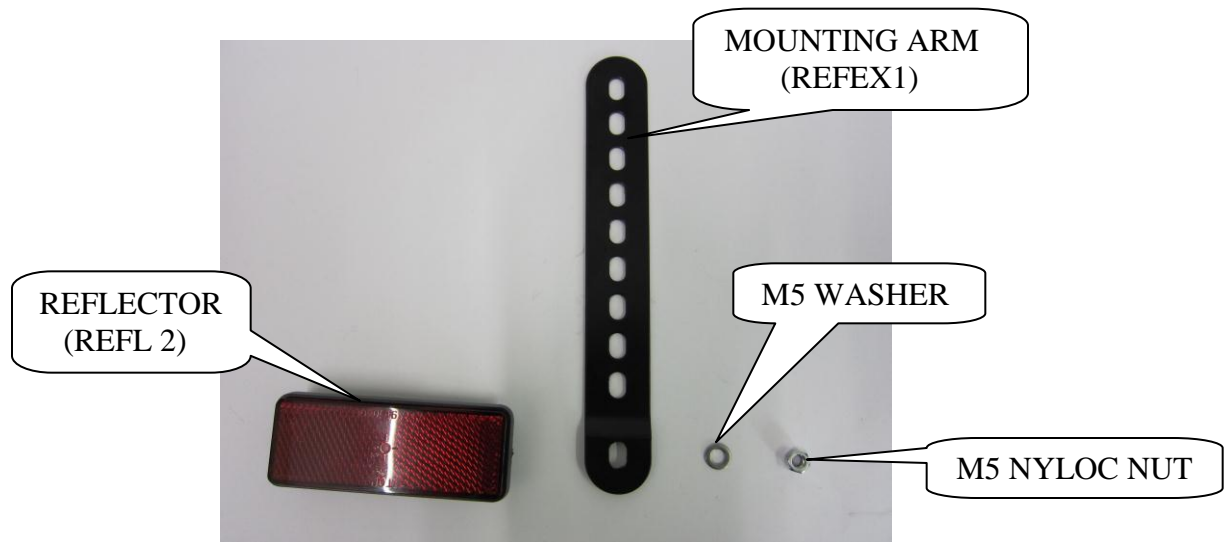



TOOLS REQUIRED

- 8 AND 10mm SPANNERS.
- FLAT BLADED DRIVER.

INSTRUCTIONS

- MOUNT THE REFLECTOR TO THE MOUNTING ARM USING THE M5 WASHER AND NUT (ENSURE IT IS FITTED AS SHOWN IN PICTURE THREE BELOW), DO NOT TIGHTEN AT THIS STAGE.



PICTURE THREE

- POSITION THE LOWER EDGE OF THE LICENCE PLATE INTO THE GAP BETWEEN MOUNTING ARM AND REFLECTOR (THIS HELPS TO PREVENT VIBRATION), NOTE THE SLOT WHICH IS ALIGNED WITH THE THIRD CENTRAL MOUNTING HOLE OF THE LICENCE PLATE BRACKET.
- MOUNT THIS ASSEMBLY USING THE THIRD CENTRAL MOUNTING HOLE IN THE LICENCE PLATE BRACKET LEAVING ALL BOLTS LOOSE.
- POSITION THE LOWER EDGE OF THE LICENCE PLATE INTO THE GAP BETWEEN MOUNTING ARM AND REFLECTOR AND TIGHTEN ALL BOLTS.

PLEASE NOTE ****

AS THE MOUNTING OF THIS ASSEMBLY MAY REDUCE THE CLEARANCE OF THE REAR WHEEL IT IS IMPORTANT TO CHECK FOR CLEARANCE OF THE REFLECTOR EXTENDER FROM THE REAR WHEEL UNDER HEAVY LOAD AND LARGE BUMPS IN THE ROAD. **IT IS YOUR RESPONSIBILITY TO CHECK FOR THIS POSSIBILITY AND TAKE AVOIDING ACTION. FAILURE TO CHECK THIS COULD RESULT IN SERIOUS INJURY.**

ISSUE 1 06/07/2011 (NSY)



CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in resellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



Instructions de montage pour REK0001
Extension reflecteur KIT 1




LE KIT CONTIENT LES PRODUITS SUIVANTS
Ne pas commencer le montage si une des pieces est manquante

Veillez noter que la facon dont le kit est emballe ne represente pas forcément la facon de le monter sur la moto.

Notez que dans les cas où les kits sont emballés avec des rondelles en caoutchouc, composantes du boulon - les rondelles en caoutchouc doivent être jetées !

LES PARTIES PRESENTEES PEUVENT ETRE SEULEMENT REPRESENTATIVES

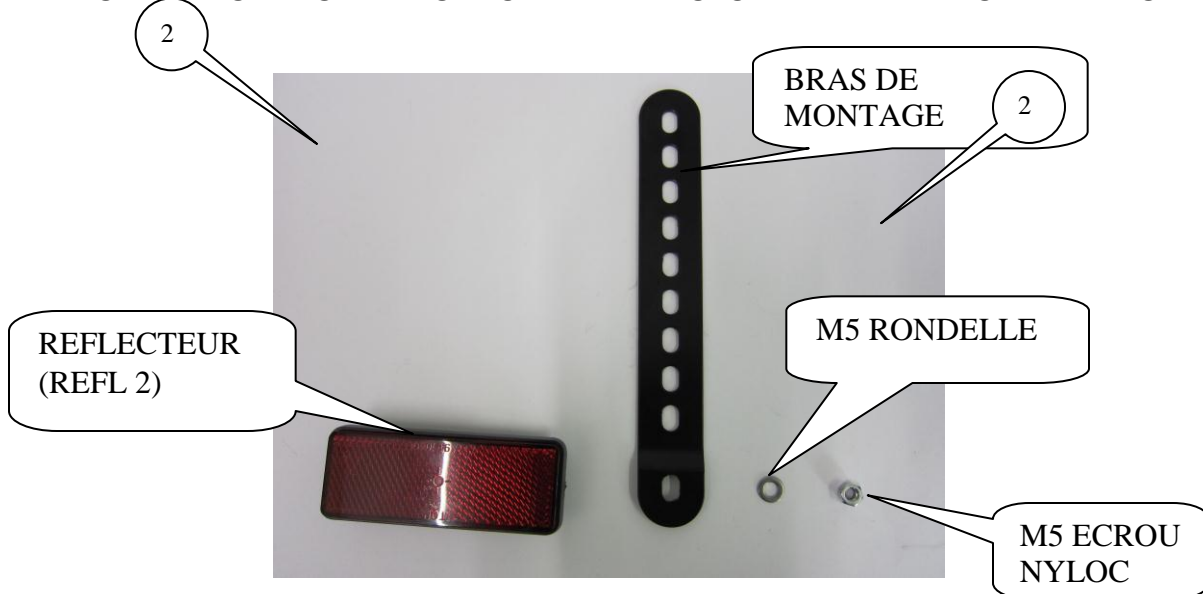



Outils requis

- Cles de 8 et 10 mm.
- Pilote a lame plate.

INSTRUCTIONS

- Monter le reflecteur au bras de montage en utilisant rondelle M5 et 2 ecrou (S'assurer que ce soit bien installe a la facon de la photo 3 ci dessous) **NE PAS SERRER POUR LE MOMENT**



Photo 3

- Positionnez le bord inferieur de la plaque d'immatriculation dans le creu entre le bras de montage et le reflecteur (Afin d'empêcher les vibrations), Notez la fente qui est alignee avec le troisieme trou du bras de montage du support de plaque d'immatriculation.
- Monter l'ensemble en utilisant le troisieme trou de montage central dans le support de plaque, laissant tous les boulons desserrés.
- Positionner le bord inferieur de la plaque d'immatriculation dans le creu entre le bras de montage et le reflecteur. Serrez ensuite toutes les vis.

A NOTER

Le montage peut reduire la visibilite de la roue arriere. Il est important de verifier la visibilite de la roue arriere avec l'extension de reflecteur meme lorsque la moto subit une charge importante ou choc via a un trou sur la route par exemple. **Il est de votre responsabilite de verifier cette partie, un manqué d'attention a cette etape pourrait conduire a de serieux degats**