



FITTING INSTRUCTIONS FOR LP0398 LICENCE PLATE BRACKET



This kit contains the items pictured and labelled over page.

Some parts may be shown for clarity of instructions only.

Do not proceed until you are sure all parts are present.

Please read all instructions before proceeding.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

In the event of rubber washers being used to hold components onto bolts, these rubber washers can be thrown away.




<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
- Set of metric Hex keys to include 4mm. - Set of metric sockets and wrench. To include 8mm, 10mm & 12mm. - Cable cutters	M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm

LEGEND


ITEM No.	DESCRIPTION	QTY
ITEM 1	MAIN MOUNTING BRACKET	1
ITEM 2	LICENCE PLATE BRACKET	1
ITEM 3	COVER PLATE	1
ITEM 4	NUMBER PLATE LIGHT	1
ITEM 5	M5 x 16mm BOLT	3
ITEM 6	M5 WASHER	3
ITEM 7	M5 NUT	3
ITEM 8	INDICATOR ADAPTOR	2
ITEM 9	LICENSE PLATE LIGHT CONNECTOR	1
ITEM 10	CABLE TIE	1
ITEM 11	HEAT SHRINK	1
ITEM 12	REFLECTOR	1





Assembly Diagram

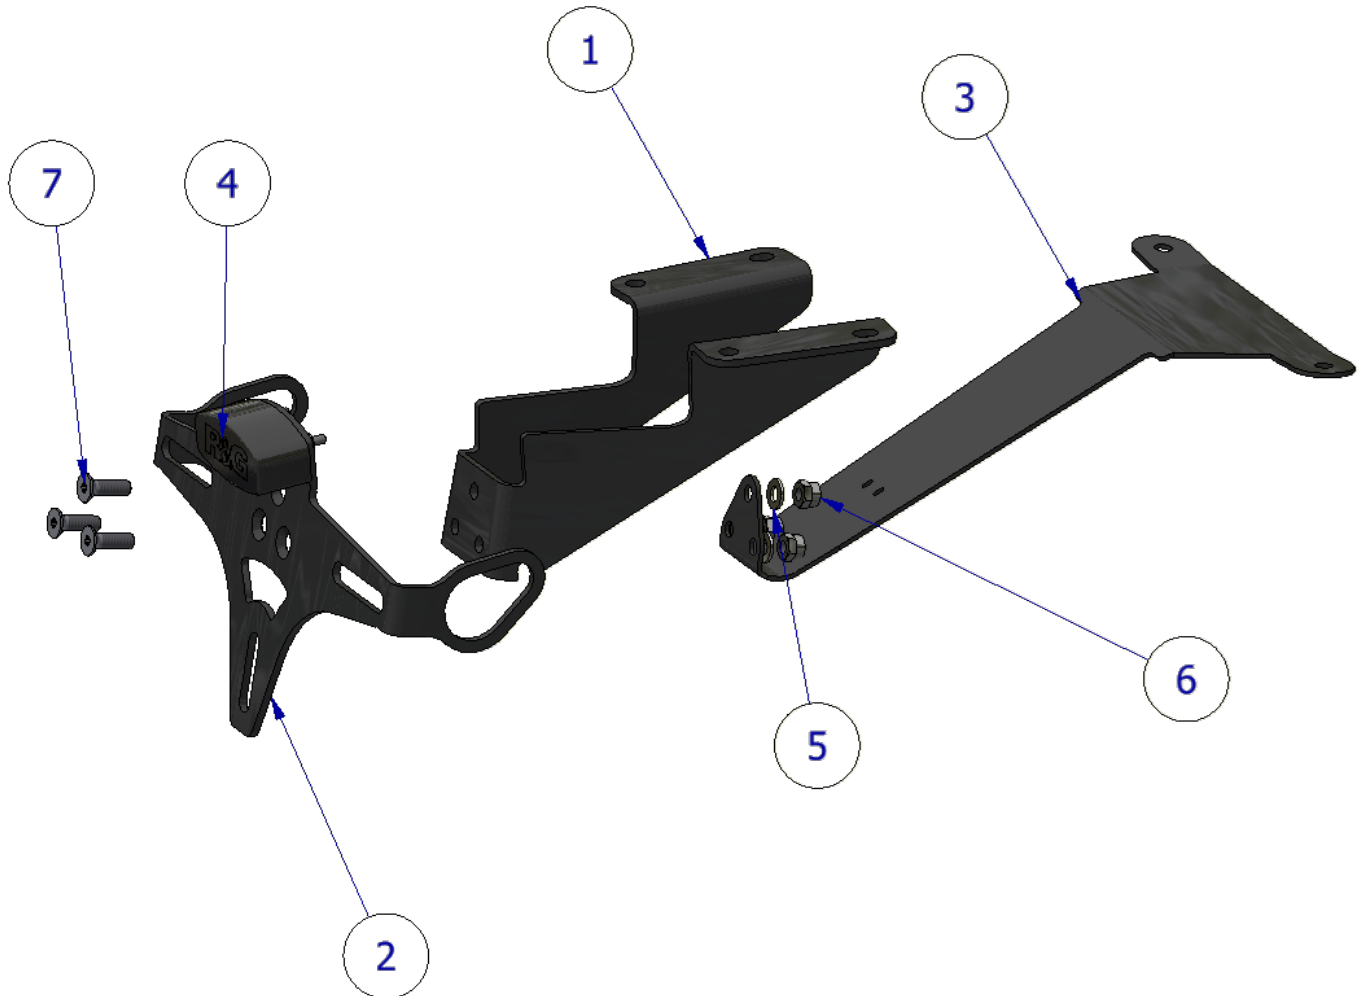

ITEM 9

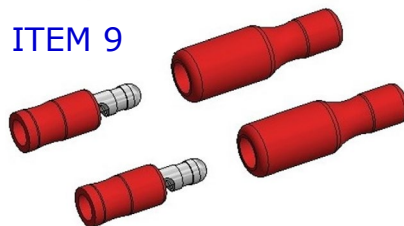

FITTING PICTURES

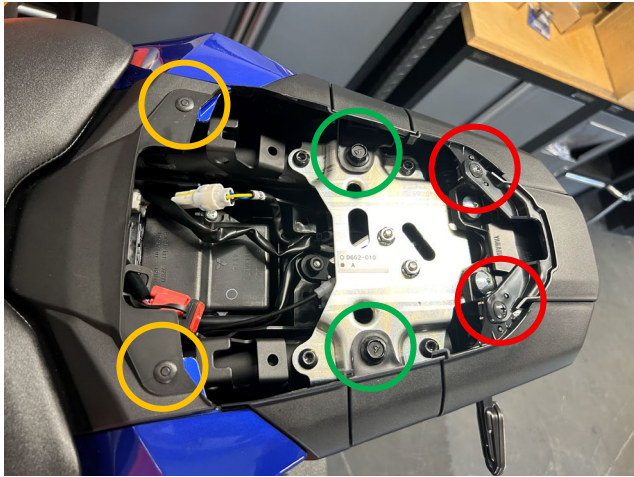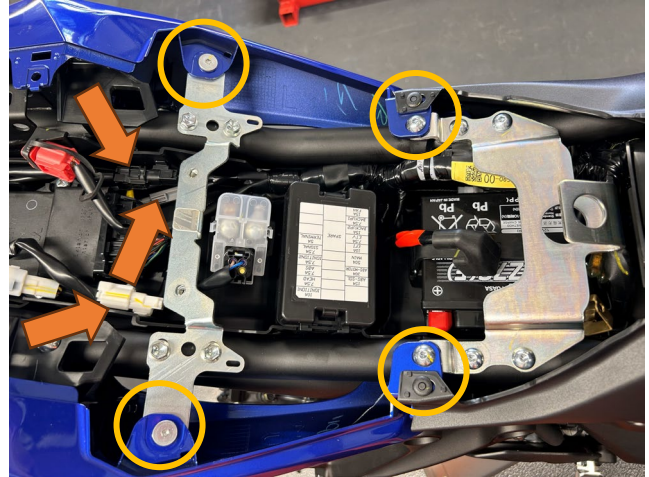**PICTURE 1****PICTURE 2****PICTURE 3****PICTURE 4****PICTURE 5**

FITTING GUIDE

Disassembly Instructions:

- Remove the OEM rear seat and any tools etc from the storage compartment.
- Remove the plastic panel between the main & passenger seat by removing the 2 poppers circled in orange in **Picture 1**, then remove the main seat.



- Remove the bolts circled in green in **Picture 1**.
- Remove the 2 screws circled in red in **Picture 1**. This will allow you to remove the rear central panel above the brake light.
- Remove all fixings circled in orange in Pictures 2, 3 & 4. This will allow you to firstly remove the 2 black panels arrowed in Picture 3, then the 2 rear cowlings. Please note that there are 2 more silver bolts not shown that will need to be removed in order to remove the rear cowlings.
- Disconnect the 3 connectors arrowed in Picture 2.
- The OEM tail unit can then be removed by removing the 4x bolts securing it in place.
- Remove the indicators from the OEM tail unit.

Assembly Instructions:

- Using the supplied heat shrink, cover the number plate light wires.
- Then fit the licence plate light (**Item 4**) to the licence plate bracket (**Item 2**).
- Fit the OEM indicators in the same way they were mounted to the OEM tail unit, ensuring the wiring passes through the holes in the bottom side of the main bracket.
- As shown in the **assembly diagram**; bolt the licence plate mounting bracket through the main mounting bracket and cover plate using the supplied countersunk bolts (**Item 5**), washers (**Item 6**) and nyloc nuts (**Item 7**).
- The license plate light and indicator wires can then be secured in place using the cable tie and slot in the cover plate.
- Fit the license plate connector onto the end of the license plate light wires.

Fitting Instructions:

- While pushing the wiring through the undertray into the bike, hold the tail tidy assembly in place and, using the OEM bolts removed earlier, secure the tail tidy in place in the original mounting holes.
- Fully tighten the bolts to their required torque.
- Offer up the rear cowling panels removed earlier to the bike, ensuring the underside fits between the OEM undertray and the tail tidy cover plate, and secure in place in the manner they were removed, using the OEM poppers to fix the cover plate in place.
- Cut/unwrap the sheathing around the OEM licence plate light connector (seen in picture 5), then cut the connector off.
- Strip the sheathing of the wires leaving roughly 10mm of exposed wire.
- Pass the supplied protective covers over the wires then crimp on the supplied bullet connectors.
- Connect the R&G licence plate light to the bullet connectors and cover with the protective covers/sheaths. (Attach the black wire on the licence plate light to the



black wire on the original loom and connect the red licence plate light wire to the remaining wire on the loom).

- Re-connect the OEM indicator connectors to the wiring loom.
- Refit all remaining OEM panels and the seats in the way they were removed.

IMPORTANT: FOR SAFETY, ENSURE THE LICENCE PLATE IS PLACED AS HIGH AS POSSIBLE ON THE TAIL TIDY (IT MAY REQUIRE DRILLING). IF FITTING A LICENCE PLATE OF 200MM OR LONGER (INCLUDING ANY SHROUD OR REFLECTOR ATTACHMENT) TO THE BRACKET, BEFORE RIDING, FULLY COMPRESS THE SUSPENSION TO ENSURE NO PART OF THE ASSEMBLY CAN CONTACT THE TYRE WHILE THE VEHICLE IS IN MOTION OR UNDER LOAD. IT IS YOUR RESPONSIBILITY TO CHECK FOR THIS POSSIBILITY AND TAKE AVOIDING ACTION. FAILURE TO CHECK THIS COULD RESULT IN SERIOUS INJURY OR DAMAGE TO THE MOTORCYCLE.

ISSUE 1 – 26/06/2025 (TB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



NOTICE DE MONTAGE LP0398 SUPPORT DE PLAQUE



CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETES SUR LA PAGE.

CERTAINES PARTIES PEUVENT ÊTRE PRÉSENTES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS PROCÉDER AU MONTAGE TANT QUE VOUS N'ÊTES PAS SÛR QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.

EN CAS DE DOUTE LORS DU MONTAGE DE NOS PRODUITS, CONSULTEZ UN DE NOS REVENDEURS OU FAITES APPEL À UN TECHNICIEN QUALIFIÉ.

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS NECESSAIREMENT LA MANIÈRE DE LE MONTER SUR LA MOTO.

SI DES RONDELLES EN CAOUTCHOUC SONT UTILISÉES POUR MAINTENIR LES COMPOSANTS SUR LES BOULONS, ELLES PEUVENT ÊTRE JETÉES.



NOTICE DISPONIBLE AU TELECHARGEMENT SUR :
WWW.RG-RACING.COM


<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
• Clés Allen 4mm. • Clé à cliquet + douilles 8mm, 10mm & 12mm. • Coupe câble	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

LÉGENDE

ARTICLE No.	DESCRIPTION	QTÉ
ARTICLE 1	SUPPORT DE PLAQUE PRINCIPAL	1
ARTICLE 2	SUPPORT DE PLAQUE	1
ARTICLE 3	PLAQUE DE COUVERTURE	1
ARTICLE 4	ÉCLAIRAGE DE PLAQUE	1
ARTICLE 5	M5 x 16mm BOULON	3
ARTICLE 6	M5 RONDELLE	3
ARTICLE 7	M5 ÉCROU	3
ARTICLE 8	ADAPTATEUR DE CLIGNOTANT	2
ARTICLE 9	CONNECTEUR DE FEU DE PLAQUE	1
ARTICLE 10	COLLIER DE SERRAGE	1
ARTICLE 11	MANCHON THERMO RÉTRACTABLE	1
ARTICLE 12	RÉFLECTEUR	1



Schéma d'ensemble

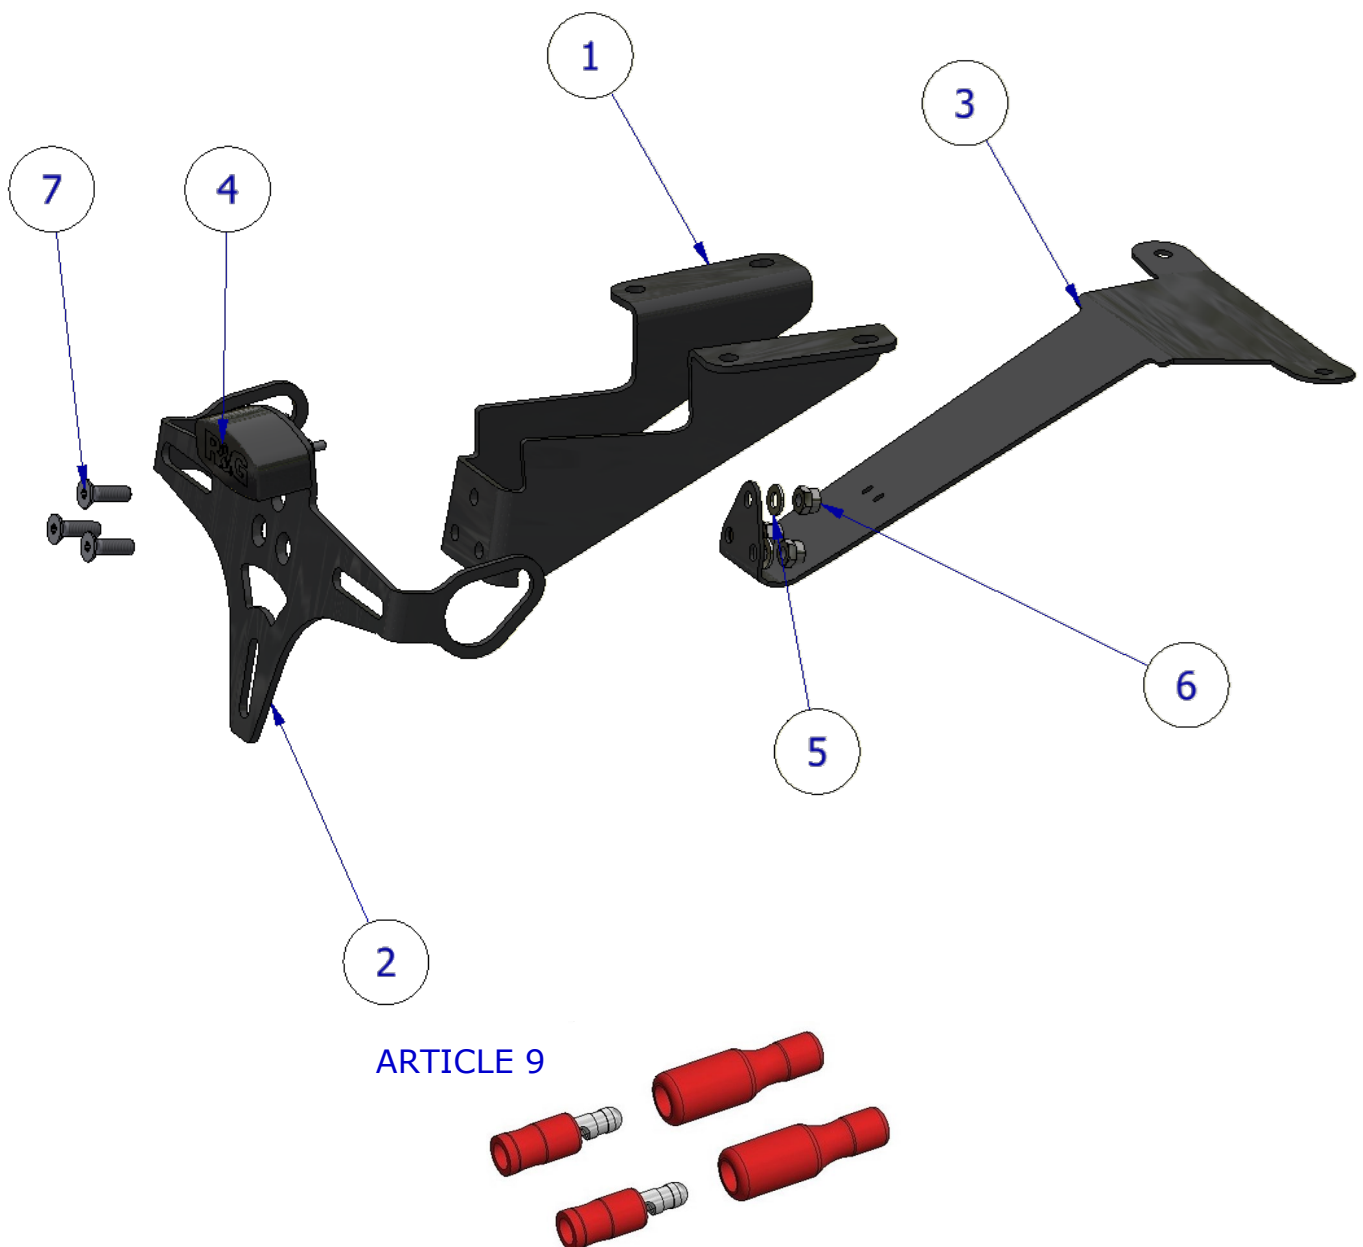



PHOTOS DE MONTAGE

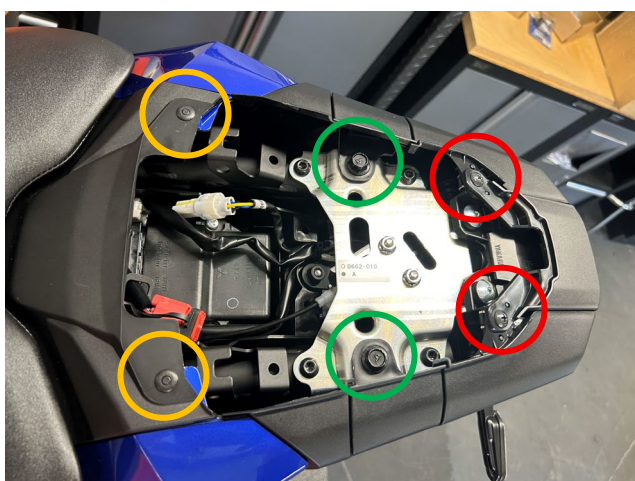


PHOTO 1

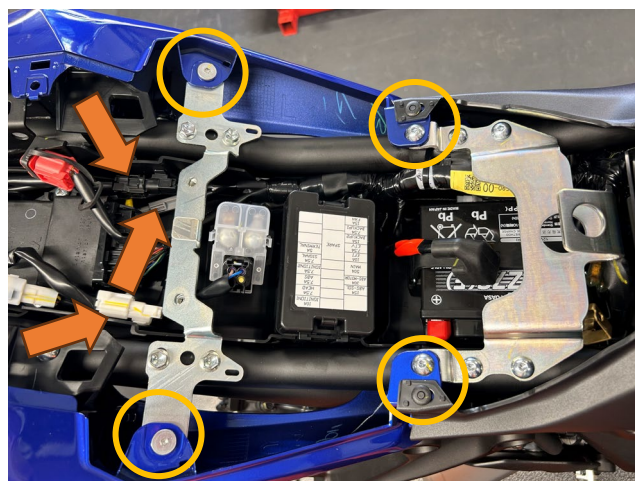


PHOTO 2



PHOTO 3



PHOTO 4



PHOTO 5

NOTICE DE MONTAGE

Notice de démontage :

- Retirez la selle arrière d'origine et tous les outils, etc. du compartiment de rangement.
- Retirez le panneau en plastique entre la selle principale et la selle passager en retirant les 2 boutons-pression entourés en orange sur la photo 1, puis retirez la selle principale.
- Retirez les boulons entourés en vert sur la photo 1.
- Retirez les 2 vis entourées en rouge sur la photo 1. Cela vous permettra de retirer le panneau central arrière au-dessus du feu stop.
- Retirez toutes les fixations entourées en orange sur les photos 2, 3 et 4. Cela vous permettra de retirer d'abord les 2 panneaux noirs fléchés sur la photo 3, puis les 2 carénages arrière. Veuillez noter que deux autres boulons argentés non représentés devront être retirés pour retirer les carénages arrière.
- Débranchez les 3 connecteurs fléchés sur la photo 2.
- L'arrière d'origine peut ensuite être retiré en retirant les 4 boulons qui le maintiennent en place.
- Retirez les clignotants de l'arrière d'origine.

Notice d'assemblage :

- À l'aide de la gaine thermorétractable fournie, recouvrez les fils de l'éclairage de la plaque d'immatriculation.
- Fixez ensuite l'éclairage de la plaque d'immatriculation (article 4) au support de plaque d'immatriculation (article 2).
- Installez les clignotants d'origine de la même manière que sur le feu arrière d'origine, en veillant à ce que le câblage passe par les trous situés sous le support principal.



- Comme indiqué sur le schéma de montage, vissez le support de fixation de la plaque d'immatriculation au support principal et à la plaque de recouvrement à l'aide des boulons à tête fraisée (article 5), des rondelles (article 6) et des écrous nyloc (article 7) fournis.
- Fixez ensuite les fils de l'éclairage de la plaque d'immatriculation et des clignotants à l'aide du serre-câble et de la fente de la plaque de recouvrement.
- Fixez le connecteur de plaque d'immatriculation à l'extrémité des fils de l'éclairage de la plaque d'immatriculation.

Notice de montage :

- Tout en poussant le câblage à travers le passage de roue dans la moto, maintenez l'ensemble du support arrière en place et, à l'aide des boulons d'origine retirés précédemment, fixez-le dans les trous de fixation d'origine.
- Serrez les boulons au couple requis.
- Présentez les panneaux de carénage arrière retirés précédemment sur la moto, en vous assurant que le dessous s'insère entre le passage de roue d'origine et la plaque de protection du support arrière. Fixez-les comme ils ont été retirés, en utilisant les boutons-pression d'origine pour fixer la plaque de protection.
- Coupez/déroulez la gaine autour du connecteur d'éclairage de plaque d'immatriculation d'origine (photo 5), puis coupez le connecteur.
- Dénudez la gaine des fils en laissant environ 10 mm de fil exposé.
- Passez les gaines de protection fournies sur les fils, puis sertissez les connecteurs cylindriques fournis.
- Connectez l'éclairage de plaque d'immatriculation R&G aux connecteurs cylindriques et recouvrez-les avec les gaines de protection. (Fixez le fil noir de l'éclairage de la plaque d'immatriculation au fil noir du faisceau d'origine et connectez le fil rouge de l'éclairage de la plaque d'immatriculation au fil restant du faisceau).
- Rebranchez les connecteurs des clignotants d'origine au faisceau.
- Remontez tous les panneaux d'origine restants et les sièges comme ils ont été déposés.

IMPORTANT : SI VOUS MONTEZ UNE PLAQUE D'IMMATRICULATION DE GRANDE TAILLE ET LA PLACEZ BIEN EN BAS SUR LE SUPPORT DE PLAQUE D'IMMATRICULATION, IL Y A UN RISQUE QUE LA PLAQUE D'IMMATRICULATION FRAPPE LA ROUE ARRIÈRE SOUS UNE CHARGE LOURDE ET SUR DE GROSSES BOSSES SUR LA ROUTE. IL EST DE VOTRE RESPONSABILITÉ DE VÉRIFIER CETTE POSSIBILITÉ ET DE PRENDRE DES MESURES POUR ÉVITER. NE PAS VÉRIFIER CELA POURRAIT ENTRAÎNER DES BLESSURES GRAVES.

ISSUE 1 – 26/06/2025 (TB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer

Racing Technique Ltd T/A R&G
Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 www.rg-racing.com Email: info@rg-racing.com



confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to fau