



**FITTING INSTRUCTIONS FOR PKS0187 KICKSTAND SHOE**



**THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.**

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

**PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.**

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS  
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.


In the event of rubber washers being used to hold components onto bolts, these rubber washers can be thrown away.

<p><b><u>TOOLS REQUIRED</u></b></p> <ul style="list-style-type: none"> <li>• 3mm A/F Allen key or bit.</li> <li>• Thread locking compound.</li> </ul>	<ul style="list-style-type: none"> <li>• <b><u>GENERAL TORQUE SETTINGS</u></b> <ul style="list-style-type: none"> <li>• M4 BOLT = 8Nm</li> <li>• M5 BOLT = 12Nm</li> <li>• M6 BOLT = 15Nm</li> <li>• M8 BOLT = 20Nm</li> <li>• M10 BOLT = 40Nm</li> <li>• M12 BOLT = 40Nm</li> </ul> </li> </ul>
---	--

### **LEGEND**

ITEM No.	DESCRIPTION	QTY
ITEM 1	MOUNTING PLATE (MP0274)	1
ITEM 2	CLAMP PLATE (PLATE0324)	1
ITEM 3	M5x8mm LONG STAINLESS-STEEL COUNTERSUNK BOLTS	4
ITEM 4	50mm STRIP OF SELF-ADHESIVE FOAM	1
ITEM 5	30mm RUBBER U-CHANNEL	1

### **EXPLODED DIAGRAM**

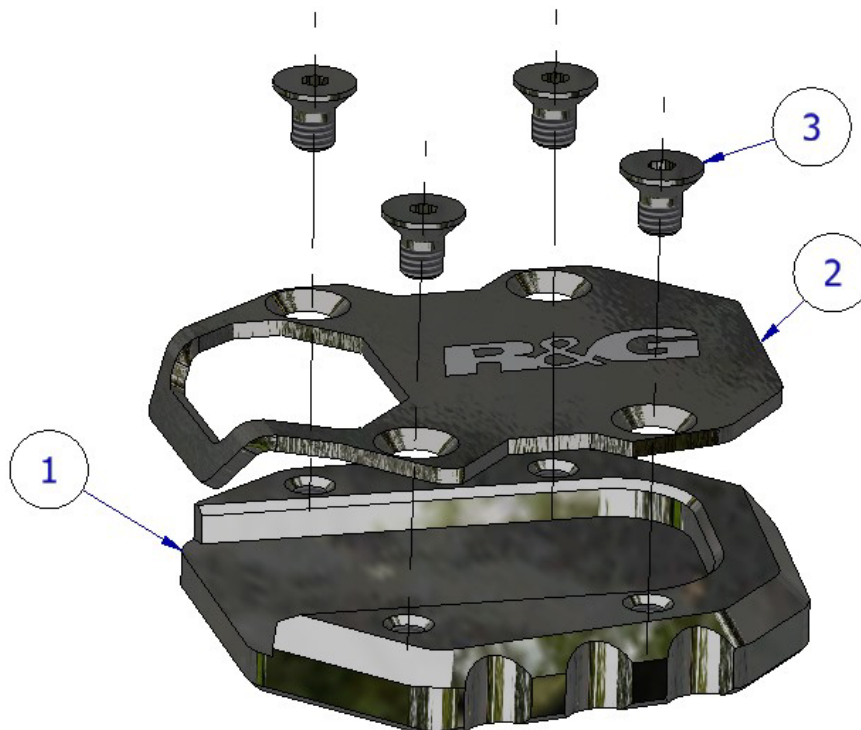


Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)

### FITTING PICTURES

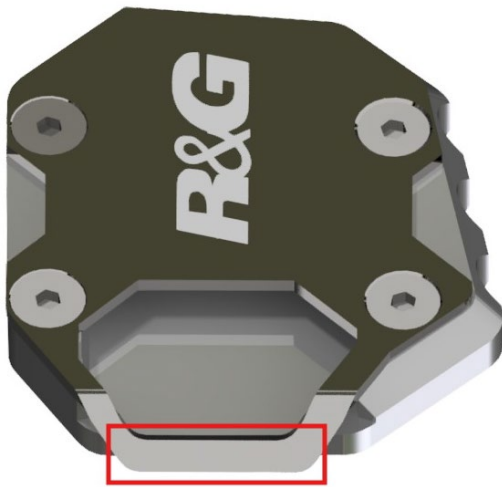

PICTURE 1



PICTURE 2

### FITTING INSTRUCTIONS

1. Place the 30mm U-channel rubber onto the clamp plate (ITEM2) in the location shown in picture 1, cut it down if needed.
2. Carefully pass the stainless-steel clamp plate (**ITEM 2**) around the side stand with the countersinks facing upwards as shown in Picture 2.
3. Take the machined aluminium mounting plate (**ITEM 1**) and fit to the base of the side stand from underneath.
4. Sandwich the two plates together around the side stand foot.
5. Apply a small amount of (one drop) of thread locking compound to the threaded end of each countersunk bolt (**ITEM 3**).
6. Fit the four bolts (**ITEM 3**) through the clamp plate and into the mounting plate, clamping the two plates securely together to the side stand foot as shown in the assembly diagram on page 2.
7. Tighten all the bolts evenly and ensure the stand is clear of the swingarm and chain when in the raised position.
8. If fitting to older used stands that have wear, the self-adhesive foam strip (**ITEM 4**) should be cut and placed into the base plate to ensure a tight fit.

ISSUE 1 - 11/04/2025 (JH)

**CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

**R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

**NOTICE DE MONTAGE POUR PKS0187 PIED DE BÉQUILLE**

Racing Technique Ltd T/A R&amp;G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)

**CE KIT CONTIENT LES ARTICLES ILLUSTRÉS ET ÉTIQUETÉS SUR LA PAGE.**

CERTAINES PIÈCES PEUVENT ÊTRE INDIQUÉES UNIQUEMENT POUR LA CLARTÉ DES INSTRUCTIONS.

NE PAS CONTINUER AVANT D'ÊTRE SÛR DE LA PRÉSENCE DE TOUTES LES PIÈCES.

**VEUILLEZ LIRE TOUTES LES INSTRUCTIONS AVANT DE CONTINUER.**

**EN CAS DE DOUTE LORS DE L'INSTALLATION DE NOS PRODUITS, CONSULTEZ UN DE NOS REVENDEURS OU FAITES INSTALLER PAR UN TECHNICIEN QUALIFIÉ.**

VEUILLEZ NOTER QUE LA FAÇON DONT LE KIT EST EMBALLÉ NE REPRÉSENTE PAS  
NÉCESSAIREMENT LE MODE DE MONTAGE SUR LA MOTO.

EN CAS D'UTILISATION DE RONDELLES EN CAOUTCHOUC POUR MAINTENIR LES COMPOSANTS  
SUR LES BOULONS, CES RONDELLES EN CAOUTCHOUC PEUVENT ÊTRE JETÉES.

<b><u>OUTILS REQUIS</u></b>	<b><u>VALEURS DE SERRAGE</u></b>
<ul style="list-style-type: none"> <li>• Clé Allen 3mm</li> <li>• Frein filet</li> </ul>	BOULON M4 = 8Nm BOULON M5 = 12Nm BOULON M6 = 15Nm BOULON M8 = 20Nm BOULON M10 = 40Nm BOULON M12 = 40Nm

**LÉGENDE**


<b>ARTICLE No.</b>	<b>DESCRIPTION</b>	<b>QTÉ</b>
ARTICLE 1	PLAQUE DE MONTAGE (MP0274)	1
ARTICLE 2	PLAQUE DE SERRAGE (PLATE0324)	1
ARTICLE 3	M5x8mm BOULONS	4
ARTICLE 4	50mm BANDEAU DE MOUSSE ADHÉSIF (NON INDIQUÉ)	1
ARTICLE 5	30mm PROFILÉ U EN CAOUTCHOUC	1

**SCHÉMA D'ENSEMBLE**


Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)

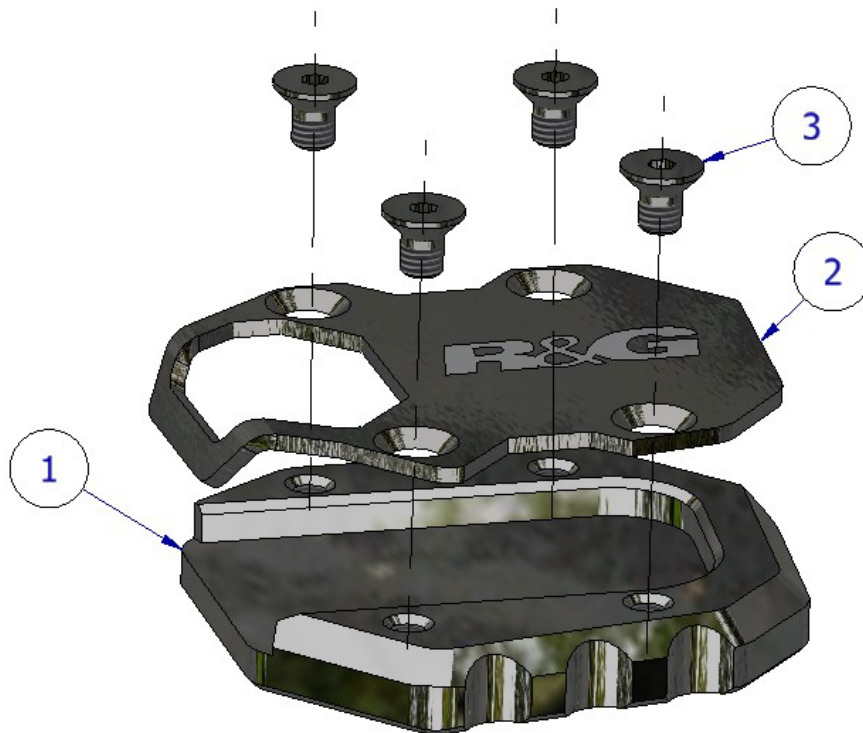

**PHOTOS DE MONTAGE**

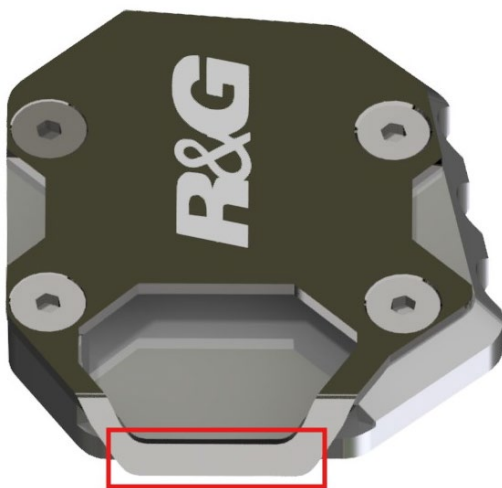

**PHOTO 1**



**PHOTO 2**





## **NOTICE DE MONTAGE**

1. Placez le profilé en U en caoutchouc de 30 mm sur la plaque de fixation (ARTICLE 2) à l'emplacement indiqué sur la photo 1, puis coupez-le si nécessaire.
2. Passez délicatement la plaque de fixation en acier inoxydable (ARTICLE 2) autour de la béquille latérale, les fraises vers le haut, comme illustré sur la photo 2.
3. Prenez la plaque de montage en aluminium usiné (ARTICLE 1) et fixez-la à la base de la béquille latérale par le dessous.
4. Assemblez les deux plaques autour du pied de la béquille latérale.
5. Appliquez une petite quantité (une goutte) de frein-filet sur l'extrémité filetée de chaque boulon à tête fraisée (ARTICLE 3).
6. Insérez les quatre boulons (ARTICLE 3) à travers la plaque de fixation et dans la plaque de montage, en les fixant solidement ensemble au pied de la béquille latérale, comme illustré sur le schéma de montage page 2.
7. Serrez tous les boulons uniformément et assurez-vous que la béquille soit dégagée du bras oscillant et de la chaîne en position relevée.
8. Pour une installation sur des supports anciens et usés, la bande de mousse autocollante (ARTICLE 4) doit être découpée et placée dans la plaque de base pour garantir un ajustement parfait.

ISSUE 1 - 11/04/2025 (JH)

### **CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

### **R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

Racing Technique Ltd T/A R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)